

青春スキャンダル / MY HERO

COIN/CREDIT OPTIONS SWITCH SETTING


DIP SWITCH #A

OPTION		1	2	3	4	5	6	7	8
1 COIN	1 CREDIT	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 COIN	2 CREDITS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 COIN	3 CREDITS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 COIN	4 CREDITS	ON	ON	OFF	OFF	ON	ON	OFF	OFF
1 COIN	5 CREDITS	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
1 COIN	6 CREDITS	ON	OFF	ON	OFF	ON	OFF	ON	OFF
2 COINS	1 CREDIT	OFF	ON	ON	OFF	OFF	ON	ON	OFF
3 COINS	1 CREDIT	ON	ON	ON	OFF	ON	ON	ON	OFF
4 COINS	1 CREDIT	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON
2 COINS	3 CREDITS	ON	OFF	OFF	ON	ON	OFF	OFF	ON
2 COINS	1 CREDIT								
4 COINS	2 CREDITS	OFF	ON	OFF	ON	OFF	ON	OFF	ON
5 COINS	3 CREDITS								
6 COINS	4 CREDITS								
2 COINS	1 CREDIT	ON	ON	OFF	ON	ON	ON	OFF	ON
4 COINS	2 CREDITS								
1 COIN	1 CREDIT								
2 COINS	2 CREDITS								
3 COINS	3 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON
4 COINS	4 CREDITS								
5 COINS	6 CREDITS								
1 COIN	1 CREDIT								
2 COINS	2 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON
3 COINS	3 CREDITS								
4 COINS	5 CREDITS								
1 COIN	1 CREDIT	OFF	ON	ON	ON	OFF	ON	ON	ON
2 COINS	3 CREDITS								
		COIN SWITCH #1				COIN SWITCH #2			

OPTION SWITCH SETTING

DIP SWITCH #B

OPTION		1	2	3	4	5	6	7	8
TABLE UPRIGHT		OFF							ON
		ON							
ADVERTISE OFF			OFF						
SOUND ON			ON						
NUMBER OF PLAYERS	3 MEN			OFF	OFF				
	4 MEN			ON	OFF				
	5 MEN			OFF	ON				
	FREE			ON	ON				
SCORE OF ADDITIONAL PLAYER	30000					OFF	OFF		
	50000					ON	OFF		
	70000					OFF	ON		
	90000					ON	ON		
GAME EASY								OFF	
DIFFICULTY HARD								ON	




BARE BD No.

171-50

171-5054



171-5054-01



BARE BD No.


171-5054-02

171-5054-03

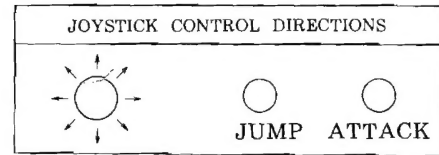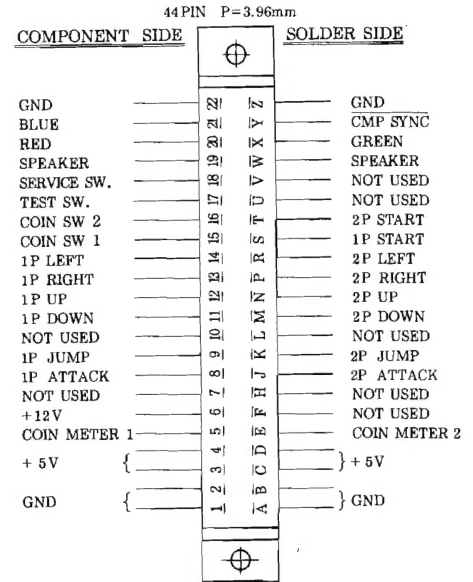

SUPPLY VOLTAGES & CURRENT

VOLTAGE	CURRENT
DC5V	4.1A
DC12V	0.25 A

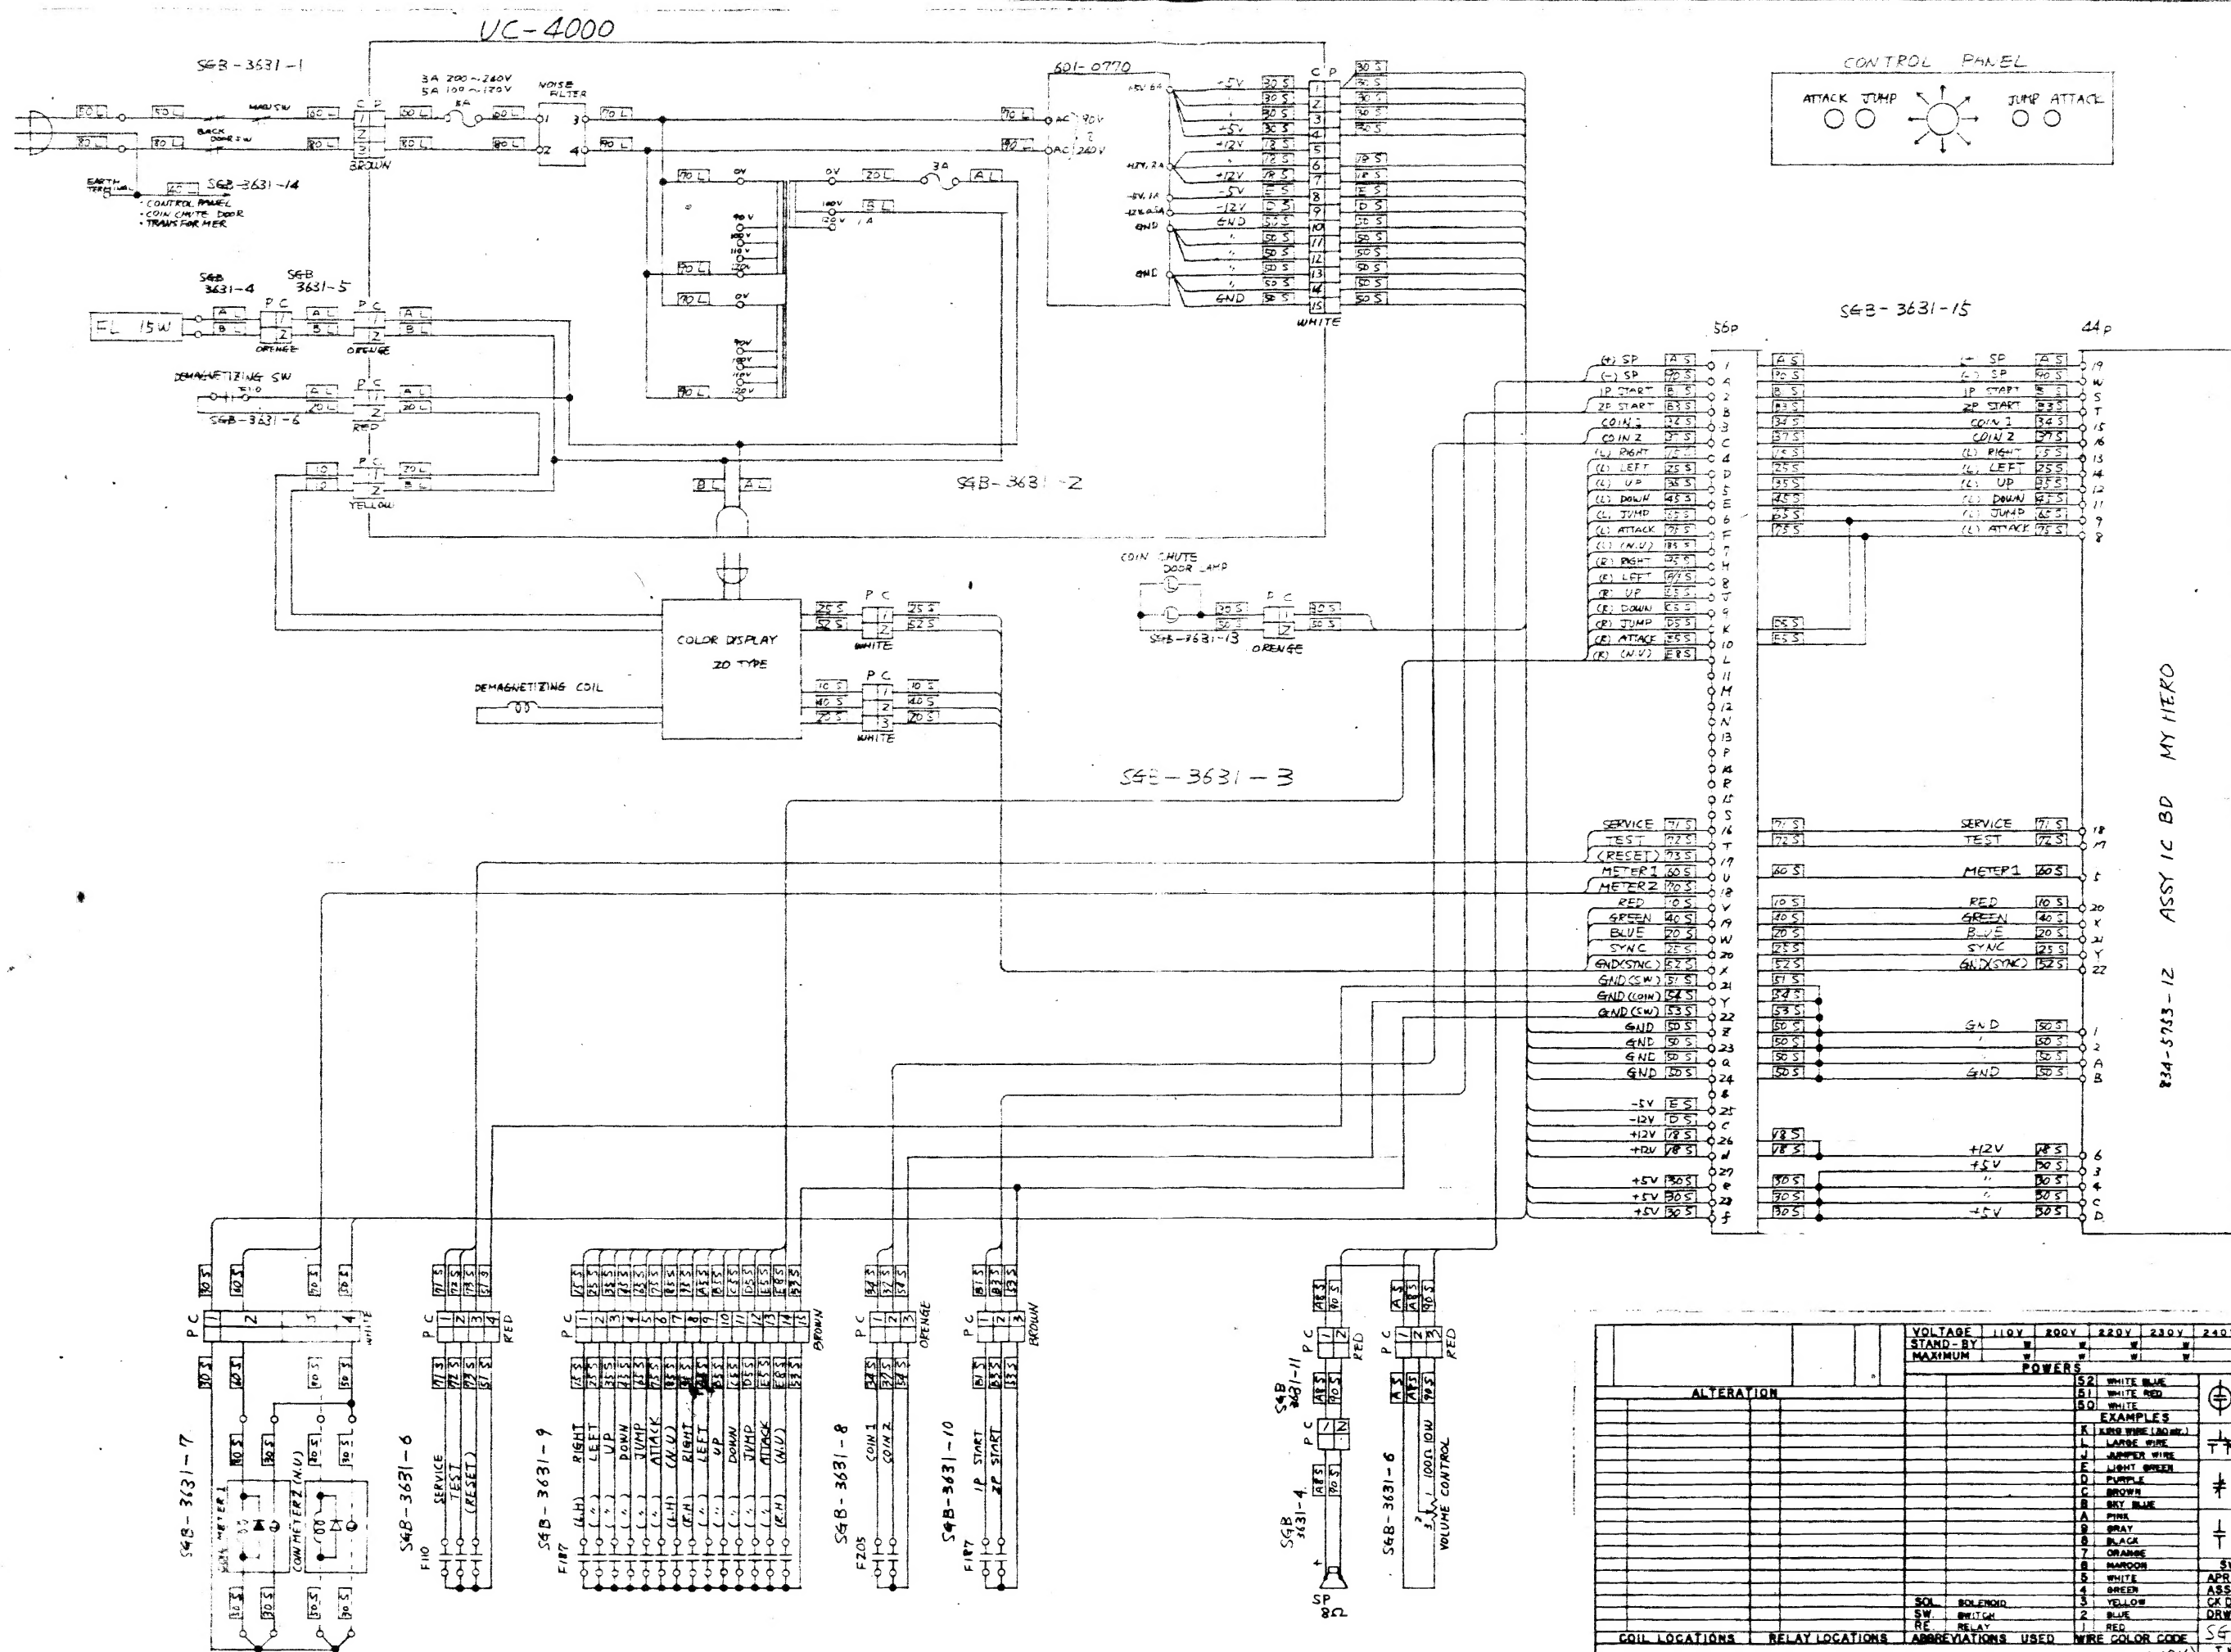

		VOLTAGE				110V				220V				240V				120V			
		STAND-BY				W				W				W				W			
		MAXIMUM				W				W				W				W			
		POWERS																POWER CONNECTION			
		<div style="display: flex; justify-content: space-between;"> <div> <p>S2 WHITE BLUE</p> <p>S1 WHITE RED</p> <p>S0 WHITE</p> <p>EXAMPLES</p> <p>K (LARGE WIRE (ADJ.))</p> <p>L LARGE WIRE</p> <p>J JUMPER WIRE</p> <p>E LIGHT GREEN</p> <p>D PURPLE</p> <p>C BROWN</p> <p>B BRY. BLUE</p> <p>A PINK</p> <p>9 GRAY</p> <p>8 BLACK</p> <p>7 ORANGE</p> <p>6 MAROON</p> <p>5 WHITE</p> <p>4 GREEN</p> <p>3 YELLOW</p> <p>2 BLUE</p> <p>1 RED</p> </div> <div> <p>COIL LOCATIONS</p> <p>RELAY LOCATIONS</p> <p>COIL LOCATIONS</p> <p>RELAY LOCATIONS</p> </div> </div>																<p>COIL IN THE SWITCH SYMBOL INDICATES OPERATION BY A MOTOR</p> <p>MAKE AND BREAK SWITCH</p> <p>NORMALLY CLOSED SWITCH OPEN WHEN ENERGIZED</p> <p>NORMALLY OPEN SWITCH CLOSED WHEN ENERGIZED</p> <p>SWITCH SYMBOLS</p> <p>APR. 1971</p> <p>ASSY. 100-240V</p> <p>CRD. 50/60 Hz</p> <p>DRY. 100-240V</p>			
		<p>SEGA MY HERO (EXPORT) (AC 100 ~ 240V 50/60 Hz)</p>																<p>S48-3631</p> <p>T.W.G. CHART NO.</p> <p>872-3</p>			
		DESCRIPTION																SCHEMATIC DIAGRAM			